

Underbar Refrigeration

TBB & TDD


English






Contents

- 2** About True
- 4** Back Bar Refrigerators
- 8** Direct Draw Beer Dispensers

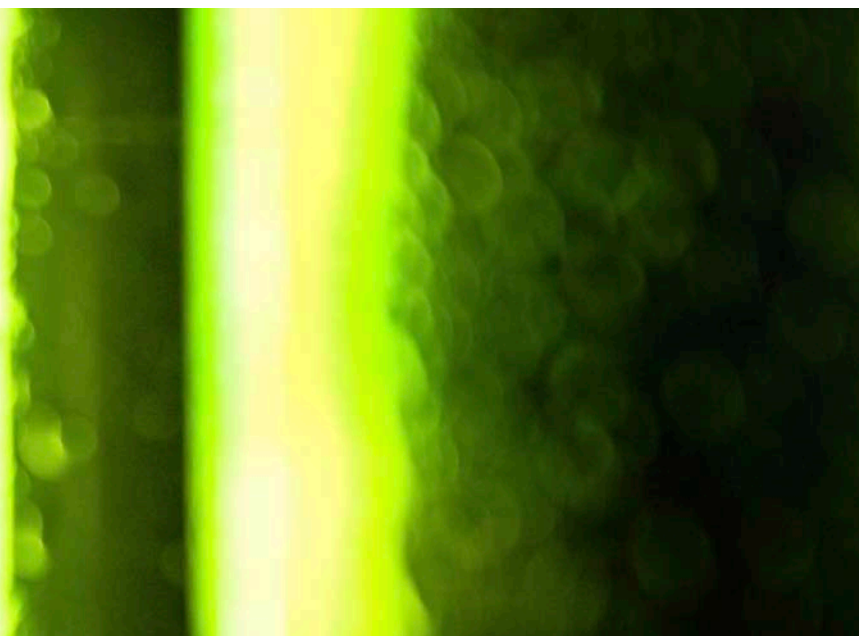



The industry's most complete refrigeration source.
True.

True is the world's leading supplier of quality commercial refrigeration. Founded over 70 years ago in Missouri, USA, True continues to flourish around the globe by offering the best possible environment to store your food products.





True, Your Energy Efficient Future... Naturally



Hydrocarbon has less than **THREE** Global Warming Potential (R134A = 1,430)



Naturally Occurring Refrigerant = Environmentally Friendly



Up to 15% more efficient than R134A and R404A



ZERO Ozone Depletion Potential



Sustainability

Over 70 Years of commercial refrigeration focus have enabled True to become experts in the design and development of our systems. While energy efficiency has always been part of our design process, we continue to utilize new technologies to improve our systems to be the most efficient in the industry, without sacrificing the performance that ultimately provides food safety for our customers throughout the World.

True continually searches for environmentally friendly components and processes to help reduce our own and our customers' carbon footprint. Initiatives include offering a natural refrigerant and a zero GWP/ODP Ecomate® foam insulation.

Energy efficiency without compromise.



Many True products have qualified for inclusion on the ECA Energy Technology list.



Our natural refrigerant option is available on select models.



Back Bar Refrigerators

True's back bar refrigerators are designed with enduring quality that protects your long-term investment.

Manufactured using the highest quality materials and components, True back bar refrigerators provide the most consistent temperature, lower utility costs and exceptional food safety delivering the best value.

With rugged construction, attractive appearance, and the most advanced and robust refrigeration systems, True's underbar refrigeration is designed to meet and exceed the performance and reliability demands of bars and restaurants.







Back Bar Refrigerators

Refrigeration

Oversized, environmentally friendly (134A) forced-air refrigeration system for maximum performance.



Robust components



Coated evaporators



LED lighting



Efficient motors



Quality materials

Temperature

Provides ice cold products 0.5°C to 3.3°C.

Interior

Interior has stainless steel floor with 13 mm lip and heavy galvanized steel walls.

LED Lighting

Safety shielded LED interior lighting provides more even lighting throughout the cabinet and consumes less energy.

Insulation

Foamed-in-place Ecomate®, a high density, (CFC free) polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).

TBB-2G-LD

Glass Swing Door Back Bar Refrigerator



TBB-2



TBB-2-S



TBB-2G-S-LD



TBB-4-S

Back Bar Refrigerators

TBB: Back Bar Refrigerators

Model	Doors	Shelves	Dimensions (mm) W x D† x H	Crated Weight (kg)
TBB-2	2	4	1496 x 689 x 940	173
TBB-2G-ID	2	4	1496 x 699 x 940	180
TBB-2-S	2	4	1496 x 689 x 940	175
TBB-2G-S-ID	2	4	1496 x 699 x 940	180
TBB-4	3	6	2296 x 689 x 940	239
TBB-4G-ID	3	6	2296 x 699 x 940	270
TBB-4-S	3	6	2296 x 689 x 940	241
TBB-4G-S-ID	3	6	2296 x 699 x 940	266

†DEPTH DOES NOT INCLUDE 35 MM FOR DOOR HANDLE ON GLASS DOOR MODELS.

†DEPTH DOES NOT INCLUDE 26 MM FOR REAR BUMPERS.

All dimensions rounded up to the nearest whole millimeter.

TBB: Back Bar Compact Refrigerators

Model	Doors	Shelves	Dimensions (mm) W x D† x H	Crated Weight (kg)
TBB-24-48	2	4	1248 x 623 x 905	137
TBB-24-48G-ID	2	4	1248 x 616 x 905	143
TBB-24-48-S	2	4	1248 x 607 x 905	134
TBB-24-48G-S-ID	2	4	1248 x 616 x 905	141
TBB-24-48G-SD-ID	2	4	1248 x 607 x 905	139
TBB-24-60	2	4	1553 x 607 x 905	164
TBB-24-60G-ID	2	4	1553 x 616 x 905	173
TBB-24-60-S	2	4	1553 x 607 x 905	164
TBB-24-60G-S-ID	2	4	1553 x 616 x 905	162
TBB-24GAL-48	2	4	1217 x 604 x 870	127
TBB-24GAL-48G-ID	2	4	1217 x 616 x 870	143
TBB-24GAL-48-S	2	4	1217 x 604 x 870	125
TBB-24GAL-48G-S-ID	2	4	1217 x 616 x 870	143
TBB-24GAL-60	2	4	1521 x 604 x 870	146
TBB-24GAL-60G-ID	2	4	1521 x 616 x 870	157
TBB-24GAL-60-S	2	4	1521 x 604 x 870	146
TBB-24GAL-60G-S-ID	2	4	1521 x 616 x 870	155

†DEPTH DOES NOT INCLUDE 35 MM FOR DOOR HANDLE ON GLASS DOOR MODELS.

†DEPTH DOES NOT INCLUDE 26 MM FOR REAR BUMPERS.

NOTE: DEPENDING ON WHICH TAPPING KIT IS USED, 30L/50L BARRELS MAY NOT FIT IN "-GAL" MODELS.

NOTE: SLIDE DOORS ON TBB-24-48G-SD MUST BE REMOVED TO PLACE 30L/50L BARRELS IN CABINET AND THEN REINSTALLED.

All dimensions rounded up to the nearest whole millimeter.



TBB-24-48



TBB-24-48G-SD-ID



TBB-24-48-S



TBB-24GAL-60G-S-ID



Direct Draw Beer Dispensers

True's direct draw beer dispensers are designed with enduring quality that protects your long-term investment.

The most advanced and robust refrigeration systems, fitted as standard in all our direct draw beer dispensers, ensure years of reliable service even in the most demanding foodservice environments.

Manufactured using the highest quality materials and components, True direct draw beer dispensers provide the most consistent temperature, and lower utility costs, delivering the best value in today's foodservice marketplace.







Direct Draw Beer Dispensers

Refrigeration

Oversized, environmentally friendly (134A) forced-air refrigeration system for maximum performance.



Robust components



Coated evaporators



Stainless steel countertop



Efficient motors



Club Top Option

Temperature

Provides ice cold products 0.5°C to 3.3°C.

TDD-2-S

Solid Swing Door Stainless Steel Direct Draw Beer Dispenser

Interior

Interior has stainless steel floor with 13 mm lip and heavy galvanized steel walls. Each cabinet designed to accommodate all types of beer kegs.



Insulation

Foamed-in-place Ecomate®, a high density, (CFC free) polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).

Draft Columns

77 mm diameter stainless steel insulated beer columns. Fan motors direct large volume of cold air into draft columns.



TDD-1



TDD-2



TDD-2CT-S



TDD-4

Direct Draw Beer Dispensers

TDD: Direct Draw Beer Dispensers

Model	Doors	Dimensions (mm) W x D† x H*	Crated Weight (kg)
TDD-1	1	597 x 794 x 1010	93
TDD-1-S	1	597 x 794 x 1010	98
TDD-2	2	1496 x 689 x 940	152
TDD-2-S	2	1496 x 689 x 940	150
TDD-2CT	2	1496 x 689 x 978	159
TDD-2CTS	2	1496 x 689 x 978	150
TDD-4	3	2296 x 689 x 940	243
TDD-4-S	3	2296 x 689 x 940	184
TDD-4CT	3	2296 x 689 x 978	232
TDD-4CTS	3	2296 x 689 x 978	205

*ADD 388 MM TO HEIGHT FOR DRAFT ARM.

†DEPTH DOES NOT INCLUDE 26 MM FOR REAR BUMPERS.

NOTE: TDD-1/-1-S NOT AVAILABLE IN REMOTE.

All dimensions rounded up to the nearest whole millimeter.

DIRECT DRAW DRAFT ACCESSORIES

DESCRIPTION	ITEM NUMBER
Double headed draft standard	980018
Triple headed draft standard	873105
Two-way manifold	873116
Three-way manifold	873117
Cap*	831233

* Used when draft standard not required (covers hole on countertop).



Two-Way Tapper Manifold



Double Headed Draft Standard




Triple Headed Draft Standard

Cap


TDD-1

Usable Interior Dimensions (WxDxH):
502 x 617 x 596 mm

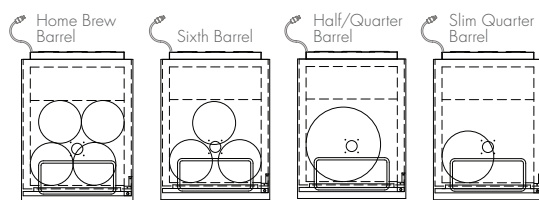


TDD-2

Usable Interior Dimensions (WxDxH):
1092 x 558 x 654 mm

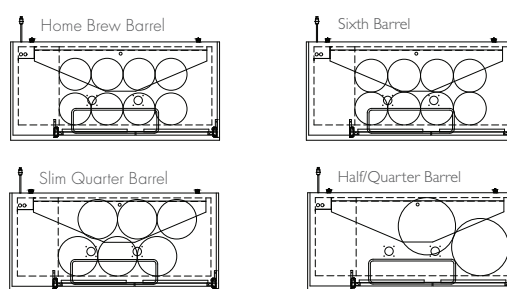

TDD-4

Usable Interior Dimensions (WxDxH):
1841 x 558 x 654 mm

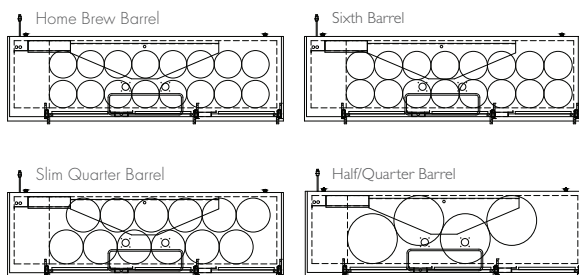

Top views shown. Please consult your beer distributor for specific sizes.



TDD-4-S



TDD-4CT



TDD-4CTS

True®

True manufactures the
widest range of professional
refrigeration products.

www.truemfg.com





Food Preparation Tables
Undercounters
Worktops
Upright Cabinets
Underbar Refrigeration
Glass Door Merchandisers
Vertical Air Curtains
Spec Series®
Chef Bases



TRUE REFRIGERATION - EUROPE

US OFFICE

2001 East Terra Lane • O'Fallon, Missouri 63366-4434 • USA
US Tel: +1 636.240.2400 • US Fax: +1 636.272.7546
US Toll Free: +1 800.325.6152 • Canada Toll Free to USA: +1 800.860.8783
Email: trueintl@truemfg.com

UK OFFICE

Fields End Road • Goldthorpe • Nr. Rotherham, South Yorkshire, S63 9EU • UK
Tel: +44 (0) 1709.888.080 • Fax: +44 (0) 1709.880.838
UK Freephone: 0 800.783.2049 • Freephone to USA: 0 800.894.928
Email: trueintl@truemfg.com

EU OFFICE

Hauptstr. 269 • 79650 Schopfheim • Germany
Tel: +49 (0) 7622.6883.0 • Fax: +49 (0) 7622.6883.499
Email: trueintl@truemfg.com

AUSTRALIA OFFICE

6B Phiney Place • Ingleburn, NSW 2565 • Australia
Tel: +61 2.9618.9999 • Fax: +61 2.9618.7259
Email: trueintl@truemfg.com

MEXICO OFFICE

Tel: +52.55.5804.6343/6344 • Fax: +52 555 804 6342
Tel U.S.A.: +1 636.240.2400 • Fax U.S.A.: +1 636.272.7546
Toll free from U.S.A. and Mexico: +1 800.325.6152
Email: trueintl@truemfg.com

CHILE OFFICE

Avenida Las Condes #7009, Local 1A Edificio A
CP 7560764, Las Condes, Santiago. Chile
Tlf. +56.232.13.3600 • Tlf. EE.UU.: +1 636.240.2400 • Fax EE.UU.: +1 636.272.7546
Email: trueintl@truemfg.com