

# Undercounters and Worktops

TUC & TWT

English






# Contents

- 2 About True
- 4 Undercounters and Worktops





The industry's most complete refrigeration source.  
True.

True is the world's leading supplier of quality commercial refrigeration. Founded over 70 years ago in Missouri, USA, True continues to flourish around the globe by offering the best possible environment to store your food products.





## True, Your Energy Efficient Future... Naturally



Hydrocarbon has less than **THREE** Global Warming Potential (R134A = 1,430)



Naturally Occurring Refrigerant = Environmentally Friendly



Up to 15% more efficient than R134A and R404A



**ZERO** Ozone Depletion Potential



# Sustainability

Over 70 Years of commercial refrigeration focus have enabled True to become experts in the design and development of our systems. While energy efficiency has always been part of our design process, we continue to utilize new technologies to improve our systems to be the most efficient in the industry, without sacrificing the performance that ultimately provides food safety for our customers throughout the World.

True continually searches for environmentally friendly components and processes to help reduce our own and our customers' carbon footprint. Initiatives include offering a natural refrigerant and a zero GWP/ODP Ecomate® foam insulation.

Energy efficiency without compromise.



Many True products have qualified for inclusion on the ECA Energy Technology list.



Our natural refrigerant option is available on select models.



# Undercounters and Worktops

True's undercounters and worktops are designed with enduring quality that protects your long-term investment.

Manufactured using the highest quality materials and components, True's undercounters and worktops provide the most consistent temperature, lower utility costs and exceptional food safety while delivering the best value in today's foodservice marketplace.







# Undercounters

## Exterior


All stainless steel front, top and sides. Aluminum finished back.



Coated evaporators



Robust components



Efficient motors



Stainless steel



Digital display

## Doors

Swing doors are self-closing with 90° degree stay open feature.

## Interior

Attractive aluminum sides and top, coved corners and stainless steel floor.

## Insulation

Foamed-in-place Ecomate®, a high density, (CFC free) polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).

## Shelves

Adjustable, heavy-duty PVC-coated wire shelves.

## TUC-27-HC

Solid Door Undercounter



TUC-24-HC



TUC-36



TUC-48-HC



















TUC-60D-4



# Undercounters

## TUC: Refrigerators

Model	Doors/Drawers	Shelves	Dimensions (mm) W x D† x H	Litres	Crated Weight (kg)	EEC	Annual Energy Consumption (kWh)
TUC-24-HC 	1 / 0	2	610 x 629 x 804	98	71	A	422
TUC-24G-HC~FGD01 	1 / 0	2	610 x 629 x 804	98	75	—	—
TUC-27-HC 	1 / 0	2	702 x 766 x 839	144	89	B	571
TUC-27-IP-HC 	1 / 0	2	702 x 766 x 810	144	84	B	571
TUC-27G-HC~FGD01 	1 / 0	2	702 x 766 x 839	144	89	—	—
TUC-27G-IP-HC~FGD01 	1 / 0	2	702 x 766 x 810	144	89	—	—
TUC-27D-2-HC 	0 / 2	—	702 x 766 x 839	40	103	B	571
TUC-27D-2-IP-HC 	0 / 2	—	702 x 766 x 810	40	96	B	571
TUC-36	2 / 0	4	924 x 766 x 839	—	109	—	—
TUC-36-IP	2 / 0	4	924 x 766 x 810	—	105	—	—
TUC-44	1 / 0	2	1131 x 820 x 839	—	132	—	—
TUC-48-HC 	2 / 0	4	1229 x 766 x 839	265	118	A	548
TUC-48-IP-HC 	2 / 0	4	1229 x 766 x 810	265	125	A	548
TUC-48G-HC~FGD01 	2 / 0	4	1229 x 766 x 839	265	139	—	—
TUC-48G-IP-HC~FGD01 	2 / 0	4	1229 x 766 x 810	265	132	—	—
TUC-48D-2-HC 	1 / 2	2	1229 x 766 x 839	169	139	A	548
TUC-48D-2-IP-HC 	1 / 2	2	1229 x 766 x 810	169	139	A	548
TUC-48D-4-HC 	0 / 4	—	1229 x 766 x 839	72	150	B	548
TUC-48D-4-IP-HC 	0 / 4	—	1229 x 766 x 810	72	150	B	548
TUC-60	2 / 0	4	1534 x 766 x 839	—	162	—	—
TUC-60-IP	2 / 0	4	1534 x 766 x 810	—	155	—	—
TUC-60D-2	1 / 2	2	1534 x 766 x 839	—	202	—	—
TUC-60D-2-IP	1 / 2	2	1534 x 766 x 810	—	202	—	—
TUC-60D-4	0 / 4	—	1534 x 766 x 839	—	182	—	—
TUC-60D-4-IP	0 / 4	—	1534 x 766 x 810	—	173	—	—
TUC-60-32	2 / 0	4	1531 x 820 x 839	—	166	—	—
TUC-60-32D-2	1 / 2	2	1531 x 820 x 839	—	166	—	—
TUC-67	2 / 0	4	1709 x 820 x 839	—	175	—	—
TUC-67D-4	0 / 4	—	1709 x 820 x 839	—	218	—	—
TUC-72	3 / 0	6	1839 x 766 x 839	—	184	—	—
TUC-93	3 / 0	6	2369 x 820 x 839	—	248	—	—
TUC-93D-2	2 / 2	4	2369 x 820 x 839	—	261	—	—
TUC-93D-4	1 / 4	2	2369 x 820 x 839	—	289	—	—
TUC-93D-6	0 / 6	—	2369 x 820 x 839	—	309	—	—

†DEPTH DOES NOT INCLUDE 26MM FOR REAR BUMPERS.

†DEPTH DOES NOT INCLUDE AN ADDITIONAL 7MM FOR FRONT BUMPER ON DEEP UNITS.

†DEPTH DOES NOT INCLUDE 4MM FOR DOOR HANDLE ON GLASS DOOR MODELS.

NOTE: FOR DOOR/DRAWER COMBO MODELS, DOOR OR DRAWER ASSEMBLY CAN BE LOCATED IN ANY SECTION OF THE CABINET. LOCATION OF DOOR/DRAWERS MUST BE INDICATED AT TIME OF ORDERING.

All dimensions rounded up to the nearest whole millimeter.

 HYDROCARBON REFRIGERANT



TUC-24G-HC~FGD01



TUC-67



TUC-93D-2



## TUC: Freezers

Model	Doors/Drawers	Shelves	Dimensions (mm) W x D† x H	Litres	Crated Weight (kg)	EEC	Annual Energy Consumption (kWh)
TUC-24F-HC	1 / 0	2	610 x 629 x 804	98	75	D	1553
TUC-27F-HC	1 / 0	2	702 x 766 x 839	144	87	C	1451
TUC-27F-IPHC	1 / 0	2	702 x 766 x 810	144	91	C	1451
TUC-27F-D-2-HC	0 / 2	—	702 x 766 x 839	40	100	D	1451
TUC-48F-HC	2 / 0	4	1229 x 766 x 839	265	132	D	2054
TUC-48F-IPHC	2 / 0	4	1229 x 766 x 810	265	125	D	2054
TUC-60F	2 / 0	4	1534 x 766 x 839	—	168	—	—
TUC-60F-IP	2 / 0	4	1534 x 766 x 810	—	171	—	—

†DEPTH DOES NOT INCLUDE 26MM FOR REAR BUMPERS.

All dimensions rounded up to the nearest whole millimeter.

HYDROCARBON REFRIGERANT



Stacking Collar

### STACKING COLLAR

DESCRIPTION	ITEM NUMBER
TUC-27-HC, 27F-HC	872963

True's stacking collar provides a space-efficient freezer and refrigerator combination in a 699mm x 762mm footprint



TUC-24F-HC



TUC-48F-HC











TUC-60F



TUC-27F-D-2-HC

# Undercounters

## TUC~SPEC1: Refrigerators

Model	Doors/Drawers	Shelves	Dimensions (mm) W x D† x H	Litres	Crated Weight (kg)
TUC-24-HC~SPEC1 	1 / 0	2	610 x 629 x 804	98	71
TUC-27-HC~SPEC1 	1 / 0	2	702 x 740 x 839	144	89
TUC-27G-HC~SPEC1 	1 / 0	2	702 x 740 x 839	144	89
TUC-27D-2-HC~SPEC1 	0 / 2	—	702 x 740 x 839	40	103
TUC-48-HC~SPEC1 	2 / 0	4	1229 x 740 x 839	265	118
TUC-48G-HC~SPEC1 	2 / 0	4	1229 x 740 x 839	265	139
TUC-48D-2-HC~SPEC1 	1 / 2	2	1229 x 740 x 839	169	139
TUC-48D-4-HC~SPEC1 	0 / 4	—	1229 x 740 x 839	72	150
TUC-60~SPEC1	2 / 0	4	1534 x 740 x 839	—	162
TUC-60D-2~SPEC1	1 / 2	2	1534 x 740 x 839	—	173
TUC-60D-4~SPEC1	0 / 4	—	1534 x 740 x 839	—	182
TUC-67~SPEC1	2 / 0	4	1709 x 820 x 839	—	175
TUC-67D-4~SPEC1	0 / 4	—	1709 x 820 x 839	—	218
TUC-72~SPEC1	3 / 0	6	1839 x 740 x 839	—	184
TUC-93~SPEC1	3 / 0	6	2369 x 820 x 839	—	248
TUC-93D-2~SPEC1	2 / 2	4	2369 x 820 x 839	—	261
TUC-93D-4~SPEC1	1 / 4	2	2369 x 820 x 839	—	289
TUC-93D-6~SPEC1	0 / 6	—	2369 x 820 x 839	—	309

† DEPTH DOES NOT INCLUDE 39 MM FOR DOOR HANDLES.




† DEPTH DOES NOT INCLUDE 26 MM FOR REAR BUMPERS.

NOTE: FOR DOOR/DRAWER COMBO MODELS, DOOR OR DRAWER ASSEMBLY CAN BE LOCATED IN ANY SECTION OF THE CABINET. LOCATION OF DOOR/DRAWERS MUST BE INDICATED AT TIME OF ORDERING.

All dimensions rounded up to the nearest whole millimeter.

 HYDROCARBON REFRIGERANT

## TUC~SPEC1: Freezers

Model	Doors/Drawers	Shelves	Dimensions (mm) W x D† x H	Litres	Crated Weight (kg)
TUC-27F-HC~SPEC1 	1 / 0	2	702 x 740 x 839	144	87
TUC-27F-D-2-HC~SPEC1 	0 / 2	—	702 x 740 x 839	40	100
TUC-48F-HC~SPEC1 	2 / 0	4	1229 x 740 x 839	265	132
TUC-60F~SPEC1	2 / 0	4	1534 x 740 x 839	265	168

† DEPTH DOES NOT INCLUDE 39 MM FOR DOOR HANDLES.

† DEPTH DOES NOT INCLUDE 26 MM FOR REAR BUMPERS.

All dimensions rounded up to the nearest whole millimeter.

 HYDROCARBON REFRIGERANT

Please see page 13 for SPEC1 features.



TUC-27F-HC~SPEC1



TUC-48F-HC~SPEC1



TUC-48F-D-2-HC~SPEC1



TUC-27F-D-2-HC~SPEC1



# Worktops

## Exterior


All stainless steel front, top and sides. Aluminum finished back.



Coated evaporators



Robust components



Efficient motors



Stainless steel



Digital display

## Doors

Swing doors are self-closing with 90° degree stay open feature.

## Interior

Attractive aluminum sides and top, coved corners and stainless steel floor.

## Insulation

Foamed-in-place Ecomate®, a high density, (CFC free) polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).

## Shelves

Adjustable, heavy-duty PVC-coated wire shelves.

## TWT-60 Solid Door Worktop Table



TWT-27-HC



TWT-48-HC








TWT-44



TWT-72

# Worktops

## TWT: Refrigerators

Model	Doors/Drawers	Shelves	Dimensions (mm) W x D† x H	Litres	Crated Weight (kg)	EEC	Annual Energy Consumption (kWh)
TWT-27HC 	1 / 0	2	702 x 766 x 1007	144	89	B	571
TWT-27D-2HC 	0 / 2	—	702 x 766 x 1007	40	100	B	571
TWT-36	2 / 0	4	924 x 766 x 1007	—	109	—	—
TWT-44	1 / 0	2	1131 x 823 x 1007	—	130	—	—
TWT-48HC 	2 / 0	4	1229 x 766 x 1007	265	127	A	548
TWT-48D-2HC 	1 / 2	2	1229 x 766 x 1007	169	150	A	548
TWT-48D-4HC 	0 / 4	—	1229 x 766 x 1007	72	150	B	548
TWT-60	2 / 0	4	1534 x 766 x 1007	—	157	—	—
TWT-60D-2	1 / 2	2	1534 x 766 x 1007	—	157	—	—
TWT-60D-4	0 / 4	—	1534 x 766 x 1007	—	186	—	—
TWT-60-32	2 / 0	4	1531 x 823 x 1007	—	164	—	—
TWT-60-32D-2	1 / 2	2	1531 x 823 x 1007	—	180	—	—
TWT-67	2 / 0	4	1709 x 823 x 1007	—	191	—	—
TWT-67D-4	0 / 4	—	1709 x 823 x 1007	—	225	—	—
TWT-72	3 / 0	6	1839 x 766 x 1007	—	184	—	—
TWT-93	3 / 0	6	2369 x 823 x 1007	—	248	—	—
TWT-93D-2	2 / 2	4	2369 x 823 x 1007	—	261	—	—
TWT-93D-4	1 / 4	2	2369 x 823 x 1007	—	277	—	—
TWT-93D-6	0 / 6	—	2369 x 823 x 1007	—	309	—	—

†DEPTH DOES NOT INCLUDE 26MM FOR REAR BUMPERS.

†DEPTH DOES NOT INCLUDE AN ADDITIONAL 7MM FOR FRONT BUMPER ON DEEP UNITS.

NOTE: FOR DOOR/DRAWER COMBO MODELS, DOOR OR DRAWER ASSEMBLY CAN BE LOCATED IN ANY SECTION OF THE CABINET. LOCATION OF DOOR/DRAWERS MUST BE INDICATED AT TIME OF ORDERING.

All dimensions rounded up to the nearest whole millimeter.

 HYDROCARBON REFRIGERANT



TWT-48D-2HC



TWT-60D-2



TWT-60D-4



## TWT: Freezers

Model	Doors/Drawers	Shelves	Dimensions (mm) W x D† x H	Litres	Crated Weight (kg)	EEC	Annual Energy Consumption (kWh)
TWT27F-HC	1 / 0	2	702 x 766 x 1007	144	96	C	1451
TWT48F-HC	2 / 0	4	1229 x 766 x 1007	265	130	D	2054
TWT60F	2 / 0	4	1534 x 766 x 1007	—	171	—	—

†DEPTH DOES NOT INCLUDE 26MM FOR REAR BUMPERS.

All dimensions rounded up to the nearest whole millimeter.

HYDROCARBON REFRIGERANT

## TWT~SPEC1: Refrigerators

Model	Doors/Drawers	Shelves	Dimensions (mm) W x D† x H	Litres	Crated Weight (kg)
TWT27HC~SPEC1	1 / 0	2	702 x 740 x 1007	144	89
TWT27D-2HC~SPEC1	0 / 2	—	702 x 740 x 1007	40	98
TWT48HC~SPEC1	2 / 0	4	1229 x 740 x 1007	265	127
TWT48D-2HC~SPEC1	1 / 2	2	1229 x 740 x 1007	169	143
TWT48D-4HC~SPEC1	0 / 4	—	1229 x 740 x 1007	72	150
TWT60~SPEC1	2 / 0	4	1534 x 740 x 1007	—	157
TWT60D-2~SPEC1	1 / 2	2	1534 x 740 x 1007	—	157
TWT60D-4~SPEC1	0 / 4	—	1534 x 740 x 1007	—	186
TWT67~SPEC1	2 / 0	4	1709 x 820 x 1007	—	191
TWT67D-4~SPEC1	0 / 4	—	1709 x 820 x 1007	—	225
TWT72~SPEC1	3 / 0	6	1839 x 740 x 1007	—	184
TWT93~SPEC1	3 / 0	6	2369 x 820 x 1007	—	248
TWT93D-2~SPEC1	2 / 2	4	2369 x 820 x 1007	—	261
TWT93D-4~SPEC1	1 / 4	2	2369 x 820 x 1007	—	277
TWT93D-6~SPEC1	0 / 6	—	2369 x 820 x 1007	—	309

† DEPTH DOES NOT INCLUDE 39 MM FOR DOOR HANDLES.

† DEPTH DOES NOT INCLUDE 26 MM FOR REAR BUMPERS.

NOTE: FOR DOOR/DRAWER COMBO MODELS, DOOR OR DRAWER ASSEMBLY CAN BE LOCATED IN ANY SECTION OF THE CABINET. LOCATION OF DOOR/DRAWERS MUST BE INDICATED AT TIME OF ORDERING.

All dimensions rounded up to the nearest whole millimeter.

HYDROCARBON REFRIGERANT



TWT27F-HC





TWT48F-HC



TWT60F

# Worktops

## TWT~SPEC1: Freezers

Model	Doors/Drawers	Shelves	Dimensions (mm) W x D† x H	Litres	Crated Weight (kg)
TWT-27F-HC~SPEC1 	1 / 0	2	702 x 740 x 1007	144	96
TWT-48F-HC~SPEC1 	2 / 0	4	1229 x 740 x 1007	265	130
TWT-60F~SPEC1	2 / 0	4	1534 x 740 x 1007	—	171

† DEPTH DOES NOT INCLUDE 39 MM FOR DOOR HANDLES.  
 † DEPTH DOES NOT INCLUDE 26 MM FOR REAR BUMPERS.

All dimensions rounded up to the nearest whole millimeter.

 HYDROCARBON REFRIGERANT


### SPEC1 FEATURES



Stainless steel liner



All metal working spec door handle

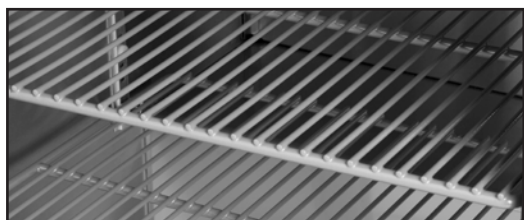

PVC coated grey wire shelves



Exterior digital temp display



Door lock



Spec Series® logo



TWT-27-HC~SPEC1



TWT-48D-4-HC~SPEC1



TWT-67~SPEC1



TWT-48F-HC~SPEC1







*True*®

True manufactures the  
widest range of professional  
refrigeration products.

[www.truemfg.com](http://www.truemfg.com)





Food Preparation Tables  
Undercounters  
Worktops  
Traditional Reach-Ins  
Underbar Refrigeration  
Glass Door Merchandisers  
Vertical Air Curtains  
Spec Series®  
Chef Bases



## **TRUE REFRIGERATION - EUROPE**

### **US OFFICE**

2001 East Terra Lane • O'Fallon, Missouri 63366-4434 • USA  
US Tel: +1 636.240.2400 • US Fax: +1 636.272.7546  
US Toll Free: +1 800.325.6152 • Canada Toll Free to USA: +1 800.860.8783  
Email: [trueintl@truemfg.com](mailto:trueintl@truemfg.com)

### **UK OFFICE**

Fields End Road • Goldthorpe • Nr. Rotherham, South Yorkshire, S63 9EU • UK  
Tel: +44 (0) 1709.888.080 • Fax: +44 (0) 1709.880.838  
UK Freephone: 0 800.783.2049 • Freephone to USA: 0 800.894.928  
Email: [trueintl@truemfg.com](mailto:trueintl@truemfg.com)

### **EU OFFICE**

Hauptstr. 269 • 79650 Schopfheim • Germany  
Tel: +49 (0) 7622.6883.0 • Fax: +49 (0) 7622.6883.499  
Email: [trueintl@truemfg.com](mailto:trueintl@truemfg.com)

### **AUSTRALIA OFFICE**

6B Phiney Place • Ingleburn, NSW 2565 • Australia  
Tel: +61 2.9618.9999 • Fax: +61 2.9618.7259  
Email: [trueintl@truemfg.com](mailto:trueintl@truemfg.com)

### **MEXICO OFFICE**

Tel: +52.55.5804.6343/6344 • Fax: +52 555 804 6342  
Tel U.S.A.: +1 636.240.2400 • Fax U.S.A.: +1 636.272.7546  
Toll free from U.S.A. and Mexico: +1 800.325.6152  
Email: [trueintl@truemfg.com](mailto:trueintl@truemfg.com)

### **CHILE OFFICE**

Avenida Las Condes #7009, Local 1A Edificio A  
CP 7560764, Las Condes, Santiago. Chile  
Tlf. +56.232.13.3600 • Tlf. EE.UU.: +1 636.240.2400 • Fax EE.UU.: +1 636.272.7546  
Email: [trueintl@truemfg.com](mailto:trueintl@truemfg.com)